


## TYRE SLIDES

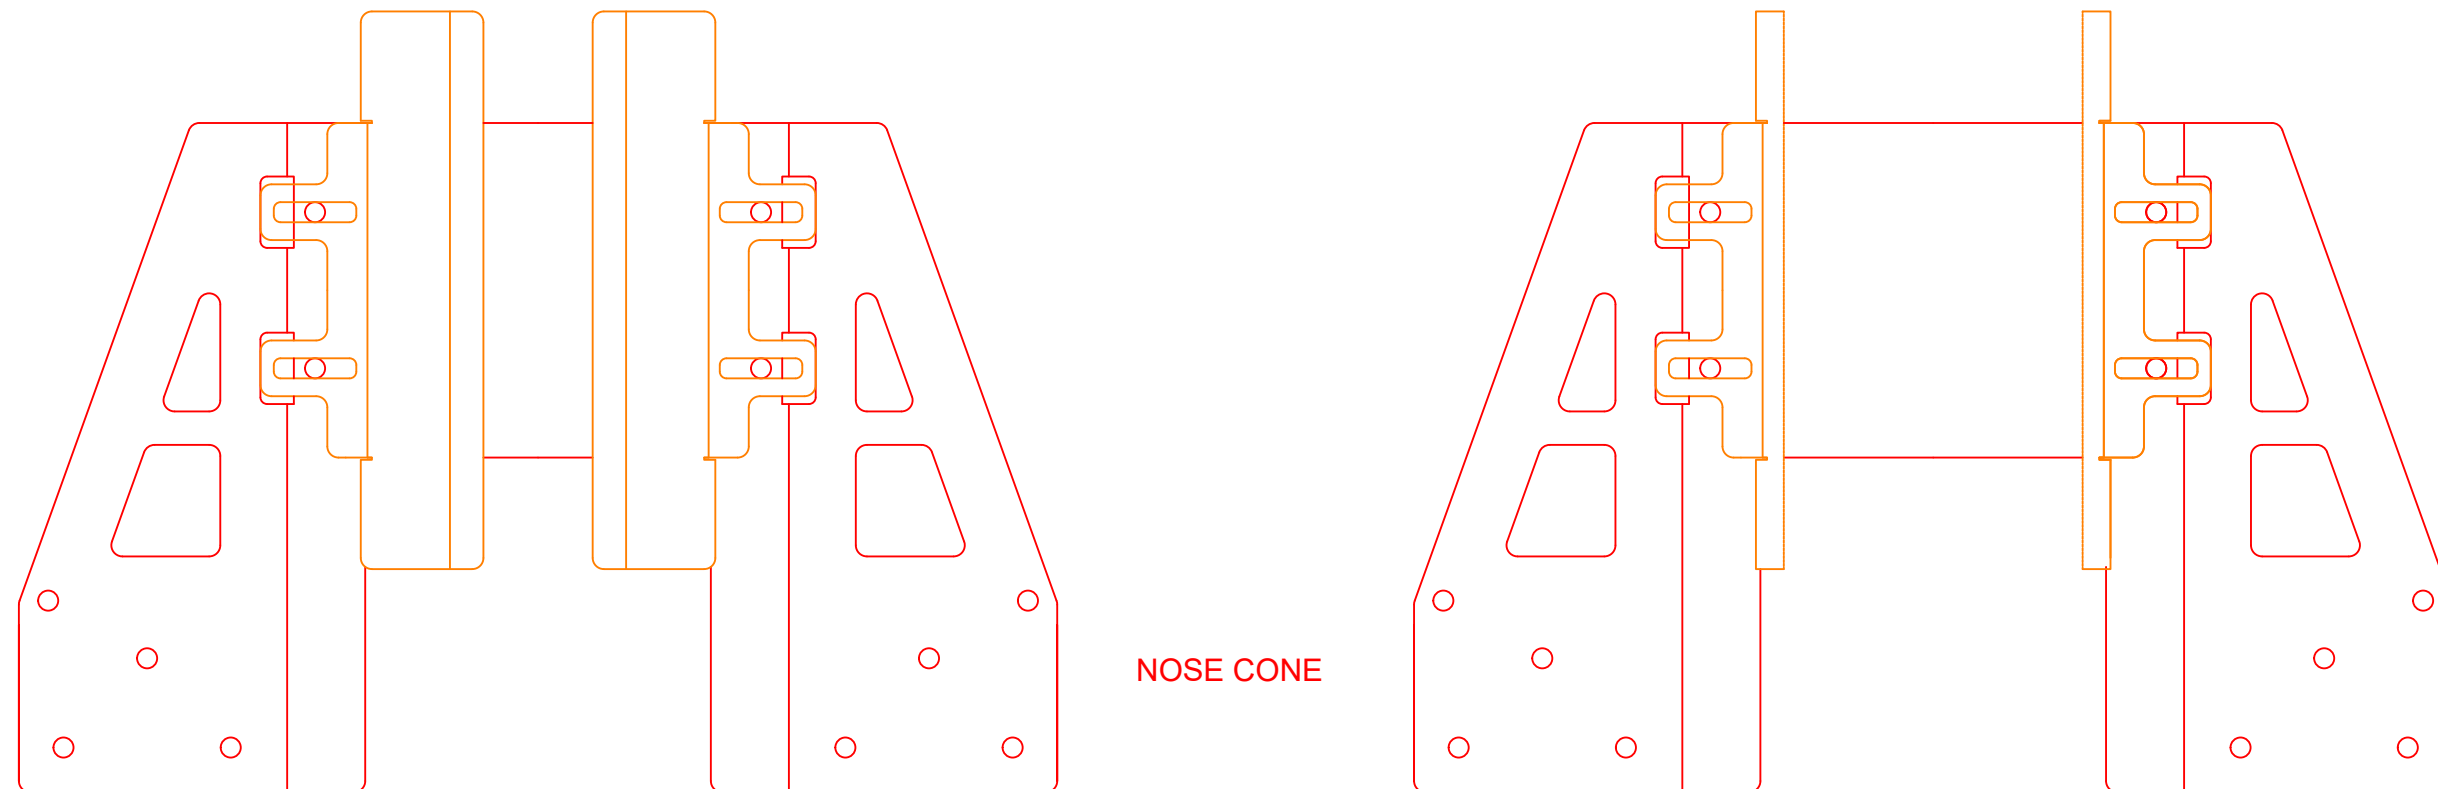

IF YOU ARE RUNNING A 120 FRONT, SET THE TYRE SLIDES APPROX 115MM APART.

OR LEAVE THE TYRE SLIDES WIDE, THEN ONCE YOU LOAD YOUR BIKE PUSH THEM UP TO EACH SIDE OF THE TYRE AND JUST TIGHTEN A LITTLE.

THEN UNLOAD THE BIKE AND ONE AT A TIME LOOSEN A TYRE SLIDE AND MOVE INWARDS ANOTHER 2-3MM, THEN TIGHTEN FULLY.

YOU WANT THESE SET SO YOU NEED TO JAM THE TYRE IN A LITTLE WHEN LOADING.

## RACK N RIDE SPORT CARRIER ASSEMBLY

### NOSE CONE + TYRE SLIDES

ALL COPYRIGHT AND OTHER PROPERTY RIGHTS  
CONTAINED HEREIN ARE THE PROPERTY OF RACK N  
ROLL PTY LTD AND ARE NOT TO BE COPIED,  
REPRODUCED OR DISTRIBUTED WITHOUT PRIOR  
WRITTEN CONSENT OF RACK N ROLL PTY LTD

© RACK N ROLL PTY LTD